

Replacing a Damaged Slider - Outside Slider

This document gives instructions for replacing the PCS Slider - **Part ID# 22727** - Under Track Outside Slider only. To replace other PCS Sliders, please refer to the appropriate document, or call our Customer Service Dept. at 800-369-5152.

Materials Needed:

-PCS Undertrack Outside Slider (**Part ID# 22727**)

Suggested Tools:

-Phillips Screwdriver

Step 1: With the Pool Cover in a central position over the pool, determine which side of the pool has a damaged Slider. Move to that side of the pool and locate the Slider Assembly, which is connected to the Leading Edge. (**NOTE: The Leading Edge is the aluminum tube that “leads” the pool cover across the pool.**)

Step 2: Hold the end of the Leading Edge tube to keep it above water and use a Phillips screwdriver to remove the two screws holding the black plastic Slider to the aluminum Slider Plate. (**Fig. 1**)

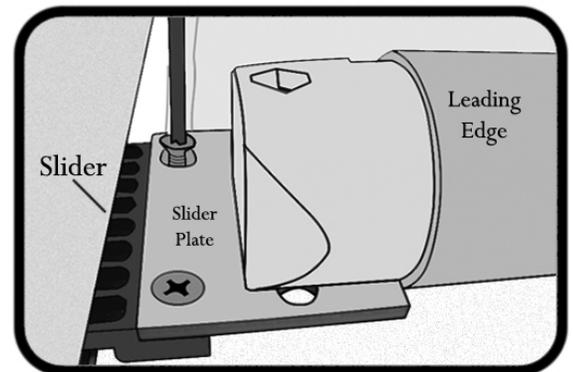


Fig. 1

Step 3: Pull up on the Leading Edge and slide the Slider away from the Pool Cover. Tilt the Slider downward and pull it away from the Track. (**Fig. 2**)

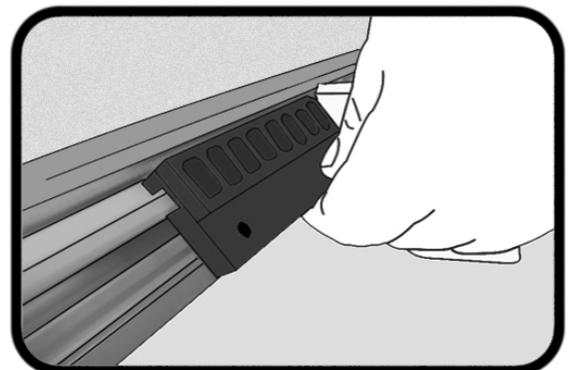


Fig. 2

Step 4: Locate the replacement Slider. (*Fig. 3*)



Fig. 3

Step 5: Hold the replacement Slider at an angle and press it into the Track channel. (*Fig. 4 and 5*)

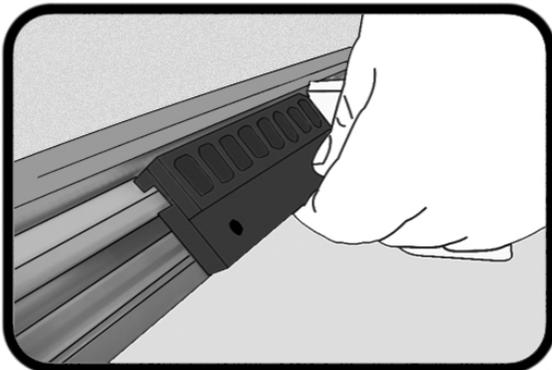


Fig. 4

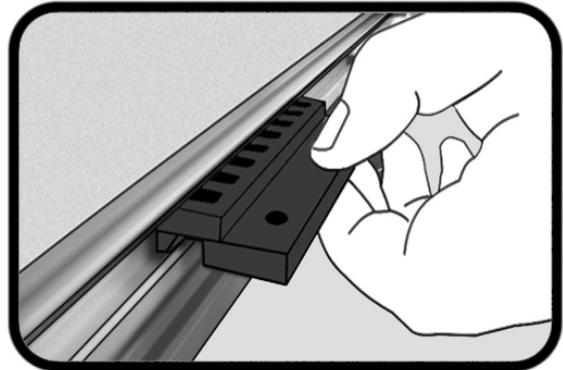


Fig. 5

Step 6: Slide the Slider back toward the Leading Edge. Lift the Leading Edge and position the Slider beneath the Slider Plate. Line up the holes and reinsert the Slider Assembly Screws. (*Fig. 6*)

Test the new Slider by operating the cover several times in both directions (*open and close*).

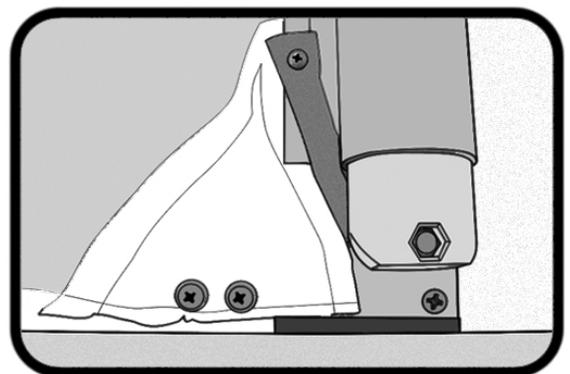


Fig. 6